

AC-DC 15W



6A-151DAXX

Features:

- Universal AC Input 90~264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- L=1200±100mm
- Meet EPS 2.0 LEVEL VI
- Safety: no approval yet



Dimension:

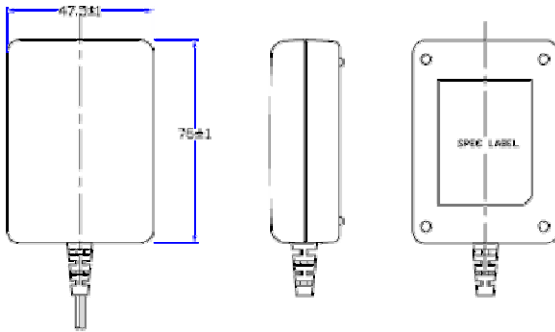

Model No.	Output		Additional Safety
6A-151DA05	5V	3.0	
6A-151DA06	5.95V	2.5	
6A-151DA09	9V	1.7	
6A-151DA12	12V	1.25	
6A-151DA15	15V	1.0	
6A-151DA24	24V	0.63	

Specification:

Input	Voltage	AC 90V~264V Universal full range
	Frequency	47-63Hz
	Current	300mA
	Leakage Current	< 0.25mA
Others	Start up time	<3000mS @ Minimum AC input
	Rise time	<100mS
	Hold up time	>20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+70°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Condensing)
M.T.B.F	50k Hours	
Safety	UL 60950-1, CSA C22.2 No.60950-1, EN60950-1, IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 , EN55022 , EN61000-3
	EMS	EN55024(EN61204-3) EN61000-4

